

# HF MED<sup>®</sup>

## YD02-LED3+4+5 (LED)Shadowless Operating lamp

Excellent cold light:adopting LED as light source,without temperature rising.

Excellent daylight quality and CRI meet the illumination needs of the doctors.

Excellent lighting effect:unique optical system,homogenous light spot,high-definition.

Brightness Adjustment:Micro computer digital control,with 8 shifts luminance for selection and it offers illuminance memory function and wide voltage working speciality.



### HF MED<sup>®</sup>

YOUR IDEAL OPERATING TABLE SUPPLIER

**SHANGHAI HUIFENG MEDICAL INSTRUMENT CO.,LTD**


Address: NO.885, Qiuxing Road, Nicheng Town, Pudong New Area, Shanghai, China.

Tel: +862158084992

Mob: +862158085105

Email: [lisa@huifeng-co.com](mailto:lisa@huifeng-co.com)

Web: [www.sh-huifeng.com](http://www.sh-huifeng.com)



Official QR code



## YD02-LED3+4+5 (LED)Shadowless Operating lamp

# HF MED

SHANGHAI HUIFENG MEDICAL INSTRUMENT CO.,LTD




**YD02-LED3+4+5**

## YD02-LED3+4+5

Renew operation irradiation parts rapidly and improves doctor's working environment

Illuminance equality, high shadowless rate, high definition to improve doctor's working efficiency

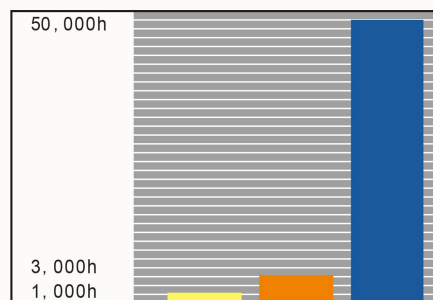

Long service life:  
Halogen generally is 1000 hours, the LED is the (Osram) more than 50000 hours.

## Main Technical Data

| YD02-LED3+4+5 (LED)Shadowless Operating lamp |   |
|--|---|
| Illuminance                                  | ≥120,000Lux ≥130,000Lux ≥150,000Lux       |
| Colour temperature                           | 4800±300K                                 |
| Colour reduction index(Ra)                   | 96  |
| Total irradiance                             | 460W/ m <sup>2</sup> 488W/ m <sup>2</sup> |
| Size of light field                          | 100~240mm                                 |
| Service life of illuminant                   | 50,000h                                   |
| Power supply voltage                         | AC110-240V 50/60Hz                        |
| Best height of installation                  | 2900mm                                    |
| Rated power of bulb                          | 3.2V/1W                                   |
| Illuminance depth                            | 600mm                                     |
| Lamp head diameter                           | 500mm/550mm                               |
| ENDO   | YES                                       |

